

The MCE40 series of PCB mount single output AC-DC medical power supplies delivers a power output of 40W and offers single output voltages ranging from 3.3V to 48VDC. The MCE40 series, which is available in open-frame and encapsulated mechanical formats, is specifically designed for medical applications with 2 x MOPP isolation and is approved for Class II applications.

With world-wide medical safety approvals, class B compliance for conducted and radiated emissions, high efficiency, high reliability, 4kVAC isolation, the MCE series benefits system designers with easy integration into a wide range of BF rated medical applications including imaging, patient treatment, surgical equipment and home healthcare applications.



Features

- ▶ 40W convection cooled
- ▶ 87.9 x 38.1mm (3.46" x 1.5") footprint, 28.5mm profile
- ▶ Regulated single outputs 3.3V to 48VDC
- ▶ Input range 80 to 264VAC
- ▶ Encapsulated or open frame formats
- ▶ High efficiency, up to 88%
- ▶ 4kVAC input to output isolation
- ▶ Class B conducted and radiated emissions
- ▶ IEC 60601-1 medical safety agency approvals, 2 x MOPP
- ▶ IEC class II insulation rating
- ▶ Overvoltage, overload and short circuit protection
- ▶ -25°C to +70°C operating temperature
- ▶ 3 year warranty

Applications




Dimensions

MCE40:
87.9 x 38.1 x 28.5mm (3.46 x 1.50 x 1.12")

MCE40-P:
85.0 x 35.1 x 27.7mm (3.35 x 1.38 x 1.09")

Documentation

Click the link or scan the code



Models & ratings

Model number ⁽¹⁾	Output voltage	Output current	Efficiency ⁽²⁾	Output power
MCE40US03	3.3VDC	9.10A	79%	30W
MCE40US05	5.0VDC	8.00A	84%	40W
MCE40US09	9.0VDC	4.44A	85%	40W
MCE40US12	12.0VDC	3.33A	86%	40W
MCE40US15	15.0VDC	2.66A	87%	40W
MCE40US24	24.0VDC	1.66A	88%	40W
MCE40US48	48.0VDC	0.82A	88%	40W

Notes:

1. For Open Frame version add suffix -P to model number, e.g. MCE40US12-P.
2. Typical efficiency at 230VAC and full load.

Input

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Input voltage range	80		264	VAC	Derate from 100% at 90VAC to 90% at 80VAC
Input frequency	47		63	Hz	
Input current - full load		0.7/0.4		A rms	At 115/230VAC
No load input power			0.3	W	
Inrush current			40	A	At 230VAC, cold start +25°C
Earth leakage current					Class II construction no earth
Input protection	Internal T1.0 A/300VAC fuse fitted in line and neutral				

Output

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Output voltage	3.3		48	VDC	
Initial set accuracy			1.5/1.0	%	1.5% for 3V3 & 5VDC models, 1% for others at 50% load
Minimum load	0			A	No minimum load required
Line regulation			1	%	
Load regulation			2		
Start up delay			2	s	
Start up rise time			35	ms	
Hold up time	8	14		ms	At full load and 115VAC
Transient response			4	%	Deviation, recovery within 1% in less than 500µs for a 25% load change
Ripple & noise			100	mV pk-pk	3.3-5VDC models, 20MHz bandwidth
			1	% pk-pk	9VDC to 48VDC models, 20MHz bandwidth
Patient leakage current		65		µA	At 264VAC, 60Hz
Overvoltage protection	115		145	% Vnom	220% typical for 3V3 model, auto recovery
Overload protection	120		200	%	
Short circuit protection					Trip & restart (hiccup mode)
Temperature coefficient			0.05	%/°C	

General

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions
Efficiency		86		%	Model dependent
Isolation: input to output	4000			VAC	2 x MOPP, suitable for BF applications
Switching frequency	17		75	kHz	Varies with load
Power density			19.685	W/cm ³	For '-P' version
Mean time between failure	550	600		khrs	MIL-HDBK-217F, +25°C GB
Weight		85 (0.187)		g (lb)	Open frame versions (-P)
		190 (0.419)			Encapsulated version

Environmental

Characteristic	Minimum	Typical	Maximum	Units	Notes & conditions	
Operating temperature	-25		+70	°C	3V3 & 5V models	Derate output linearly from 100% at +45°C to 45% at +70°C
					Other models	Derate output linearly from 100% at +50°C to 50% at +70°C
Storage temperature	-40		+85	°C		
Cooling	Convection-cooled					
Humidity			95	%RH	Non-condensing	
Operating altitude			5000	m		
Shock	IEC68-2-27, 30g, 11ms half sine, 3 times in each of 6 axes					
Vibration	IEC68-2-6, 2g, 10Hz to 500kHz, 10 mins/cycle, 60 mins each cycle					

EMC: Emissions

Phenomenon	Standard	Test level	Notes & conditions
Conducted	EN55011	Class B	If output is connected to ground, additional external components will be required. See application notes
Radiated	EN55011	Class B	
Harmonic current	EN61000-3-2	Class A	
Voltage flicker	EN61000-3-3		

EMC: Immunity


Phenomenon	Standard	Test level	Criteria	Notes & conditions
Medical	EN60601-1-2	As below	As below	
ESD immunity	EN61000-4-2	±8kV contact, ±15kV air discharge	A	
Radiated immunity	EN61000-4-3	10 V/m	A	
EFT/Burst	EN61000-4-4	3	A	
Surge	EN61000-4-5	2	A	Line to line
Conducted	EN61000-4-6	10Vrms	A	
Magnetic fields	EN61000-4-8	30A/m	A	
Dips and interruptions	EN61000-4-11 (115VAC)	70% U_T (80.5VAC) for 100ms	A	
		40% U_T (46VAC) for 200ms	B	
		<5% U_T (0VAC) for 10ms	A	
		<5% U_T (0VAC) for 5000ms	B	
	EN61000-4-11 (230VAC)	70% U_T (161VAC) for 100 ms	A	
		40% U_T (92VAC) for 200ms	A	
		<5% U_T (0VAC) for 10ms	A	
		<5% U_T (0VAC) for 5000ms	B	

Safety approvals


Certification	Standard	Notes & conditions
CB	IEC60601-1	Medical, 2 x MOPP
UL	ES60601-1/CSA-C22.2 No.60601-1:14	Medical, 2 x MOPP
TUV	EN60601-1	Medical, 2 x MOPP
CE	Meets all applicable directives	
UKCA	Meets all applicable legislation	

Efficiency graphs

MCE40US12-P

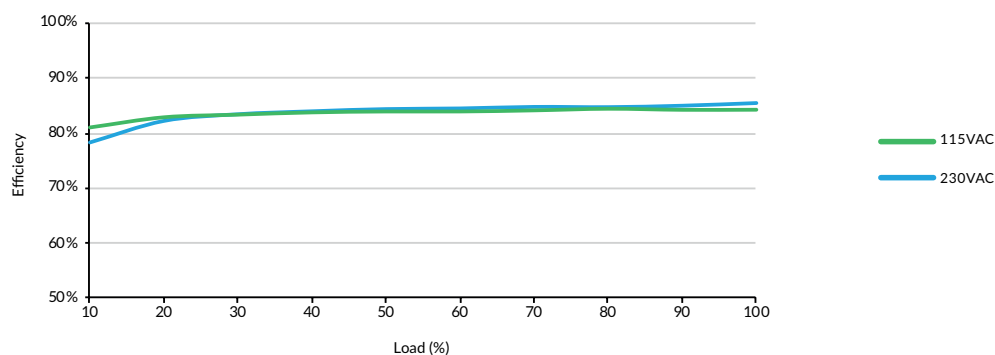


MCE40US24-P

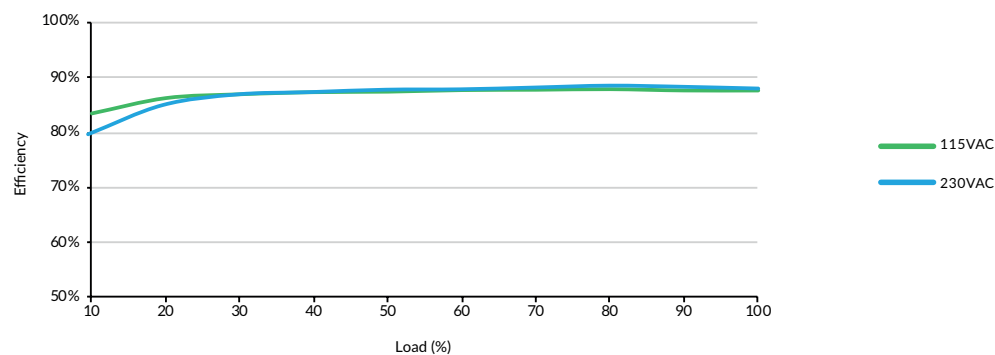

Application notes

EMC with output grounded

This product is designed for class II operation, but if there is a requirement to connect the output to ground then additional components as shown below can be added to improve emissions.

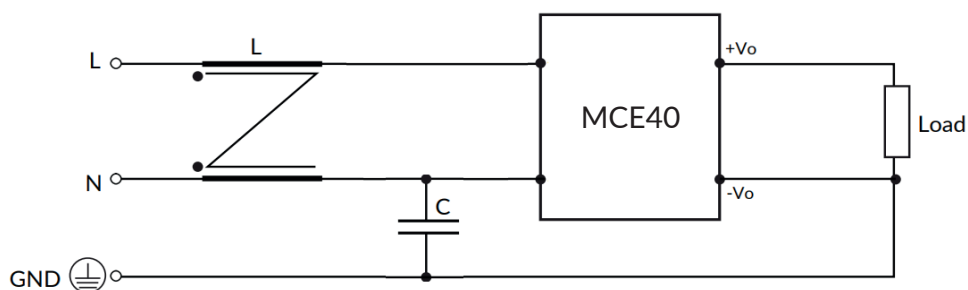


Suggested value - C: Y1 cap, 10mm. 1000pF/400VAC, 20% CD TDK.

- L: CMCK DIP UU-9.8 Φ 0.35*60T 10mH (min)


Mechanical details

Encapsulated

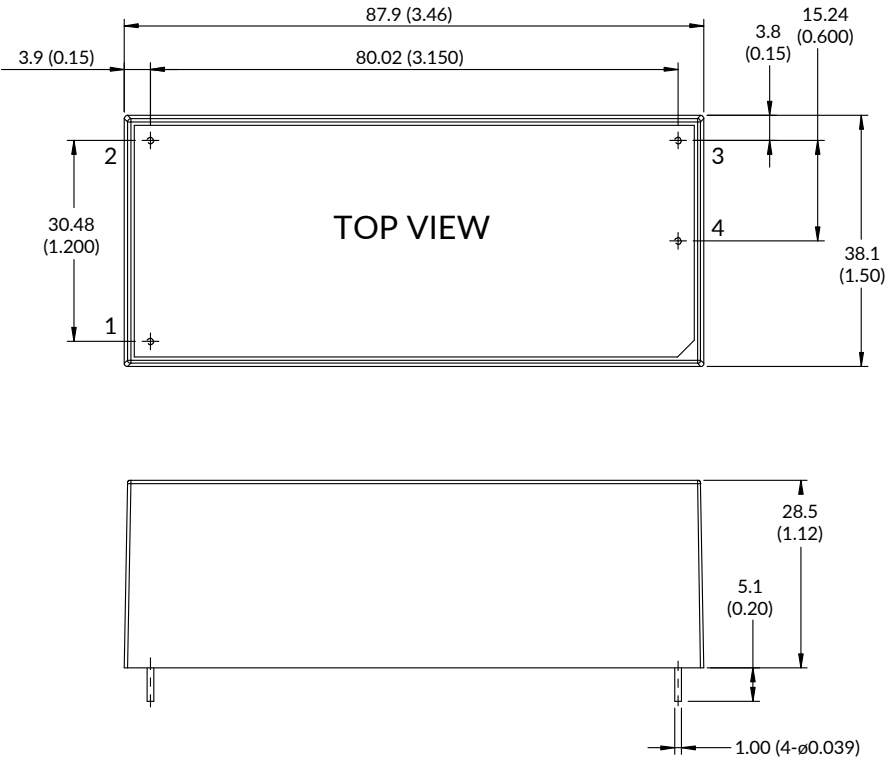

Pin	Standard
1	ACL
2	ACN
3	+Vout
4	-Vout

Open Frame (-P)

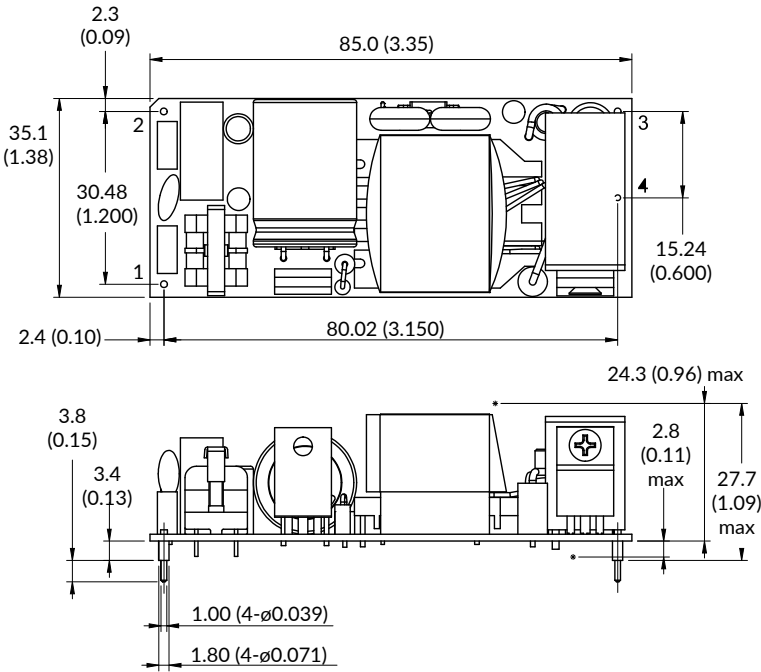

Notes:

- 1. Dimensions in mm (inches).
- 2. Weight: Open frame versions (-P): 85g (0.187lbs) Encapsulated: 190g (0.419lbs)
- 3. Tolerances: x.xx (x.x) = ±0.5 (±0.02). x.xxx (x.xx) = ±0.25 (±0.01)